

KJ 12.8V80Ah
磷酸铁锂电池组
LITHIUM IRON PHOSPHATE BATTERY
电性能ELECTRICAL PERFORMANCE

| | |
|----------------------|--------------------|
| 标称电压Nominal Voltage | 12.8 V |
| 标称容量Nominal Capacity | 80 Ah |
| 充电时间Capacity @ 16A | 300 min |
| 功率Energy | 1024 Wh |
| 内阻Resistance | ≤70 mΩ @ 50% SOC |
| 自耗电Self Discharge | <3% / Month |
| 电芯Cells | 32700 Cell 3.2V6Ah |

充电性能CHARGE PERFORMANCE

| | |
|-----------------------------------|-----------------------|
| 标准充电电流 | 16 A |
| Recommended Charge Current | |
| 最大充电电流Max Charge Current | 80 A |
| 建议充电电压 | 14.6 V |
| Recommended Charge Voltage | |
| 保护板充电截止电压 | <15.2 V (0.5 ~ 1.5 s) |
| BMS Charge Cut-Off Voltage | |
| 充电恢复电压Reconnect Voltage | >14.4 V |
| 均衡电压Balancing Voltage | <14 V |
| 最大串联容量Maximum Batteries in Series | 4 |

放电性能DISCHARGE PERFORMANCE

| | |
|------------------------------------|----------------------|
| 标准放电电流 | 40 A |
| Continuous Discharge Current | |
| 最大放电电流Max Discharge Current | 80 A |
| 保护板最大截止电流 | 200 A (5 ~ 15 ms) |
| BMS Discharge Cut-Off Current | |
| 建议截止低电压 | 10 V |
| Recommended Low Voltage Disconnect | |
| 保护板放电截止电压 | >8.4 V (50 ~ 150 ms) |
| BMS Discharge Cut-Off Voltage | |
| 放电恢复电压Reconnect Voltage | >10 V |
| 短路保护时间Short Circuit Protection | 200 ~ 600 μs |


机械性能MECHANICAL PERFORMANCE


| | |
|--------------------------|------------------------------|
| 尺寸（长X宽X高） | 260 x 168 x 209 mm |
| Dimension (L x W x H) | 10.2 x 6.61 x 8.22" |
| 重量Approx. Weight | 9.5 kg |
| 端子类型Terminal Type | M8 |
| 终端扭矩Terminal Torque | 80 ~ 100 in-lbs (9 ~ 11 N-m) |
| 外壳材质Case Material | ABS |
| 防护等级Enclosure Protection | IP65 |

温度性能TEMPERATURE PERFORMANCE

| | |
|------------------------------|---------------------------|
| 放电温度Discharge Temperature | -4 ~ 140 °F (-20 ~ 60 °C) |
| 充电温度Charge Temperature | 32 ~ 113 °F (0 ~ 45 °C) |
| 储存温度Storage Temperature | 23 ~ 95 °F (-5 ~ 35 °C) |
| 保护板截止温度 | 149 °F (65 °C) |
| BMS High Temperature Cut-Off | |
| 保护板恢复温度 | 118 °F (48 °C) |
| Reconnect Temperature | |

认证COMPLIANCE



| | |
|-----------------------------|-----------------------------------|
| 证书Certifications | CE UN38.3 UL1642 & IEC62133 |
| 运输证书Shipping Classification | UN 3480, CLASS 9 |

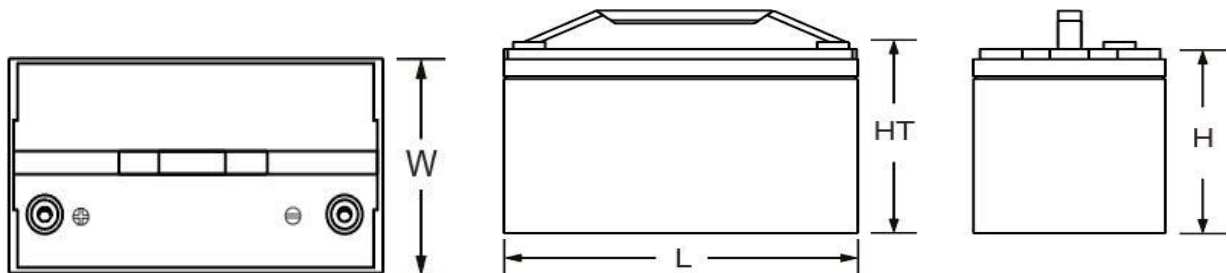外形尺寸OUTLINE DIMENSION


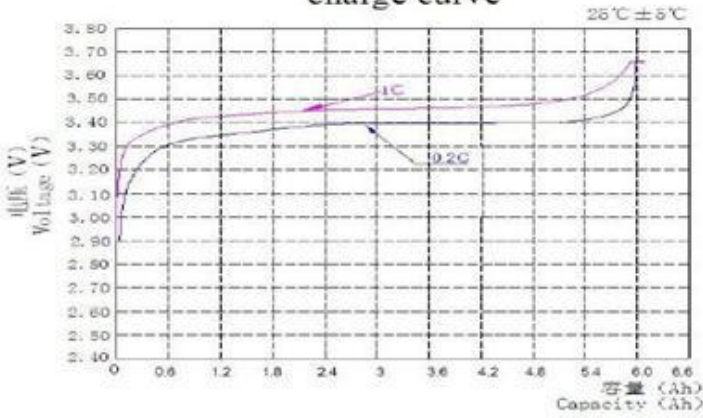
| | | | |
|------------|------------|------------|----------|
| L mm(") | W mm(") | H mm(") | HT mm(") |
| 260 (10.2) | 168 (6.61) | 209 (8.22) | |

KJ 12.8V80Ah


性能特性 PERFORMANCE CHARACTERISTICS

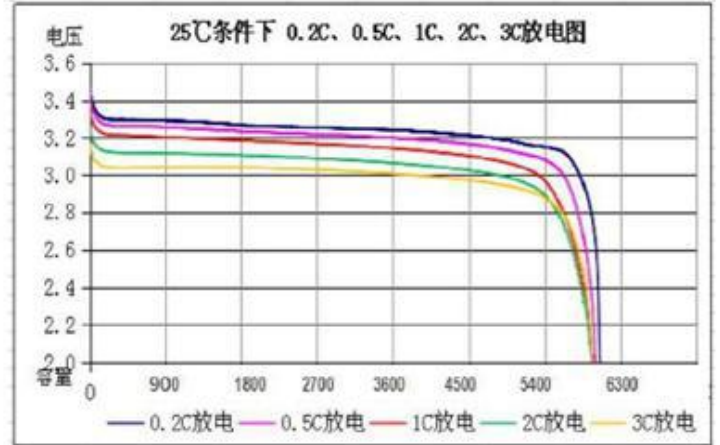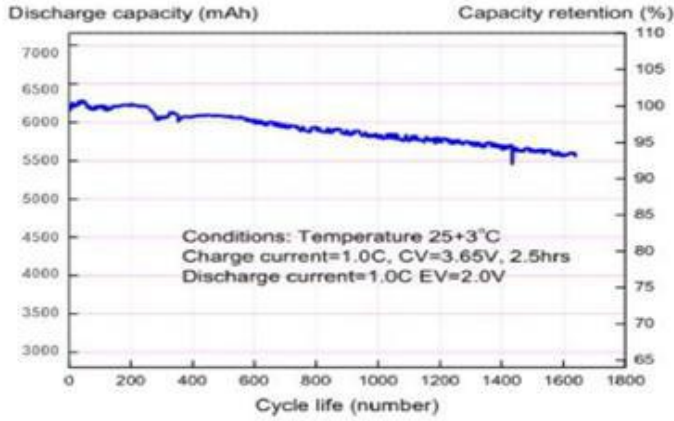

充电曲线图
charge curve



放电曲线图
Diploid discharge curve

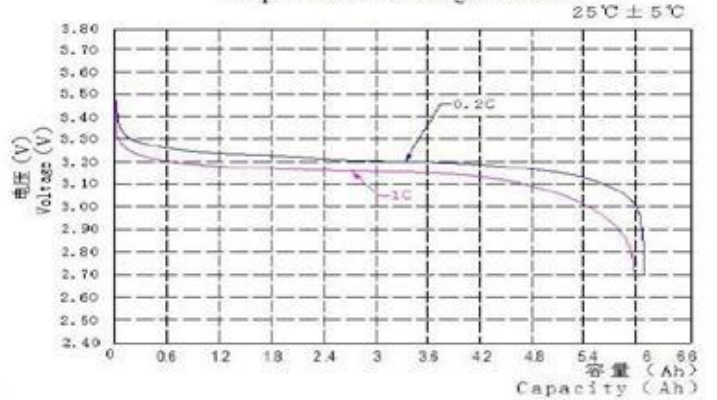

KJ 12.8V80Ah

功能和好处FEATURES & BENEFITS



高循环寿命High cycle life

>2000循环@80%低成本方案电池组。
>2000 cycles @80% DoD for effectively lower total cost of ownership.



更长使用寿命Longer service life

低维护电池，化学材料稳定，易于监控智能型号的电荷状态。
Low maintenance batteries with stable chemistry. Easily monitor state of charge (SoC) of smart models.



内置电路保护Built in circuit protection

电池管理系统(bms)可保护由于使用不当。
Battery Management Systems (BMS) are incorporated against abuse.



方便储藏Better storage

由于其极低的自释放率及无硫化风险，因此可长达6个月。

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



快速充电Quickly recharge

节省时间，提高生产效率，减少下行次数，提高充放电效率。
Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



极端耐热性Extreme heat tolerance

适用于环境温度异常的领域:高达60°C。
Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



轻便Lightweight

同等容量，锂电池的重量是铅酸电池的1/3。
Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

应用领域APPLICATIONS

锂电池可替代大部分铅酸电池，主要使用范围如下：
Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries.
Suitable applications include:

- 大篷车Caravan
- 海洋巡航车Marine
- 高尔夫球车Golf Car
- 四轮车Buggies
- 太阳能存储Solar Storage
- 远程监控Remote Monitoring
- 切换应用程序等等Switching applications and more

注意事项CAUTIONS

- 禁止短路、挤压或拆卸
- Do NOT short circuit, crush or disassemble.
- 禁止加热或焚烧
- Do NOT heat or incinerate.
- 禁止浸泡在任何液体中
- Do NOT immerse in any liquid.
- 以50% 容量储存。每三个月充电一次。贮存环境应清洁、阴凉、干燥及通风。
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.

性能可能会因应情况有所变动，所有规格如有更改，恕不另行通知，此数据仅用于评估，这不能作为保证或担保。如需查询详情及最新资讯，请与我们联系。

Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.

